

_____ 500-30-C SERIES



Bottom View



ACCESSORY CONNECTOR

- Remote Activation Switch
 - Ejection seat
 - Parachute
- Water switch
- G-Switch


BATTERY

Field replaceable every 5 years (or after activation)

FEATURES

- Robust, compact and light-weight
- Multiple activation methods
- Increased functionality
- Speech mode
- Transmission of 406 MHz and 121.5 MHz and 243MHz SAR frequencies
- GPS enabled
- User re-programmable
- Cospas-Sarsat approved

Top View

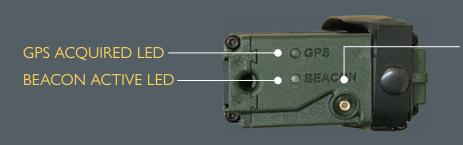

SMB ANTENNA CONNECTOR

- Trailing Tri-Frequency
 Antenna for Parachutes
 or Ejection Seats
- Life Jacket Antenna

Side View



TWO-WAY SPEECH

• Communication with rescue team



ON/OFF/TEST Switch

INTEGRATED ANTENNA

- Tri-Frequency
- GPS

PERSONAL LOCATOR BEACON

500-30-C SERIES

Exceptional adaptability makes the 500-30 series a perfect fit for military applications, including integration into critical equipment such as life rafts, life vests, flight jackets, and ejection seats. Its unparalleled flexibility offers a tailor-made solution, meticulously crafted to meet the precise needs of the military, all housed within a compact and portable design.

Accessories & Installations





Specification

Weight Dimensions	0.95lbs (430g) 4.98 × 2.76 × 1.30" (126.3 × 70 × 33mm)	Operation	24 hrs (406, 243, 121.5 MHz) Additional 24 hrs (243, 121.5 MHz) -4 to +131°F (operational at -40°F) -20 to +55°C (operational at -40°C)
Colour	NATO Green	Antenna Options	Integral tape antennaTri-Frequency Trailing Tri-Frequency/GPS Antenna for Parachutes or Ejection Seats Life Jacket Tri-Frequency/GPS Antenna
Connectors	1× SMB for additional antennas 1× Mulit-pin for accessories		
C/S Tx	406 MHz (Cospas-Sarsat) including GPS position	Activation Options	ON/OFF/TEST Switch Martin-Baker Auto Activation Cradle
Homing Tx	121.5 & 243.0 MHz (Homing)	Орионз	Remote Activation Cable Water Switch and/or G-Switch Butler Parachure ARM/OFF Switch Lanyard
GPS Rx	72 Channels 2.5m Accuracy		
Programming	COSPAS-SARSAT message user programmable	Waterproof	33 ft (10 m)
Speech	Push-To-Talk button Two-way on 121.5 & 243.0 MHz	Battery Pack	Field replaceable every 5 years (or after activation)

Compliance

The PLB is compliant with the following specifications:

Civil: EUROCAE ED62A / RTCA DO-204A / EUROCAE ED14F / RTCA DO-160F / COSPAS-SARSAT

Military: NATO - STANAG 7007 / MIL STD 810G



+44(0) 1568 708 744 | sales@hr-smith.com | hr-smith.com